

# 2273 Series

## Compact PUSH WIRE® Connectors




### 2273 Series

#### Technical Data

0.5 - 2.5mm<sup>2</sup> solid

450 V/4 kV/2<sup>⊕</sup>

24 A

 11 mm

Description.	Item No.	Box Unit.
--------------	----------	-----------

transparent housing

<input type="radio"/> 2-conductor	<b>2273-202</b>	100
<input checked="" type="radio"/> 3-conductor	<b>2273-203</b>	100
<input type="radio"/> 4-conductor	<b>2273-204</b>	100
<input type="radio"/> 5-conductor	<b>2273-205</b>	100
<input type="radio"/> 8-conductor	<b>2273-208</b>	50

### 2273 Series

#### Accessories

Description.	Item No.	Box Unit.
--------------	----------	-----------

<input checked="" type="radio"/> Mounting Carrier	<b>2273-500</b>	10
---	-----------------	----


## Operating



1. Strip the conductor 11mm.




2. Insert the conductor fully into the housing to complete the connection.



3. To remove, simply twist and pull the connector and conductor at the same time.

## Advantages & Accessories

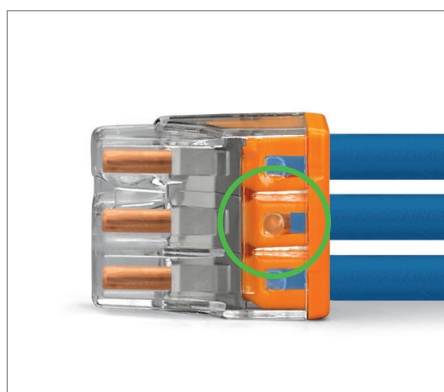

### 100% Transparent Housing

Safety check


- Wire inserted properly
- Insulation stripped properly



### Test slot

Back of the housing

- Easy testing while installed

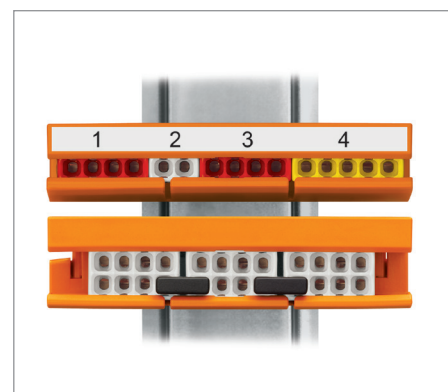

### 2273-500 Mounting Carrier

With various mounting options

- Horizontal mounting on DIN 35 rail
  - Horizontal screw mounting
  - Connectors can be commoned using the 862-482 jumper
- Please note jumpers can not be removed.